




Structure

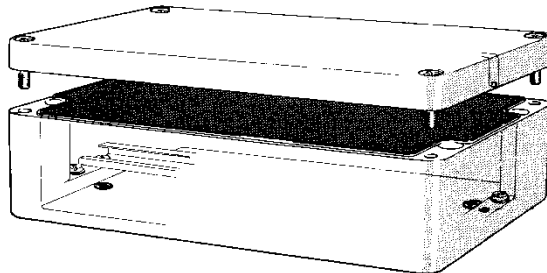

Box material GRP

Glassfibre-reinforced polyester

Colour	: black, RAL 9005
Protection type	: IP 66, EN 60529
Temperature range	: -50...+95°C
Impact resistance	: >7 Nm, EN 50014

Standard enclosures. Lid and base fastened by captive lid screws in stainless steel (plus/minus screw head).

Type designation

- The boxes are equipped with terminals of make WAGO. Terminals from other manufacturers are available on request.
- All boxes are available in Ex e and Ex i version.
- Installation inside with thermostats, glands etc. is documented in the connecting scheme by ordering.

Standard types

EK 110 / RK 110	length/width/hight	75mm/110mm/55mm
EK 120 / RK 120	length/width/hight	122mm/120mm/90mm
EK 160 / RK 160	length/width/hight	160mm/160mm/90mm
EK 260 / RK 260	length/width/hight	260mm/160mm/90mm
EK 360 / RK 360	length/width/hight	360mm/160mm/90mm
(other dimensions on request)		

Ex-Certificate

PTB 00 ATEX 1002
PTB 01 ATEX 1118
PTB 01 ATEX 1016
PTB 01 ATEX 1104